


FUEL & LUBE SKIDS

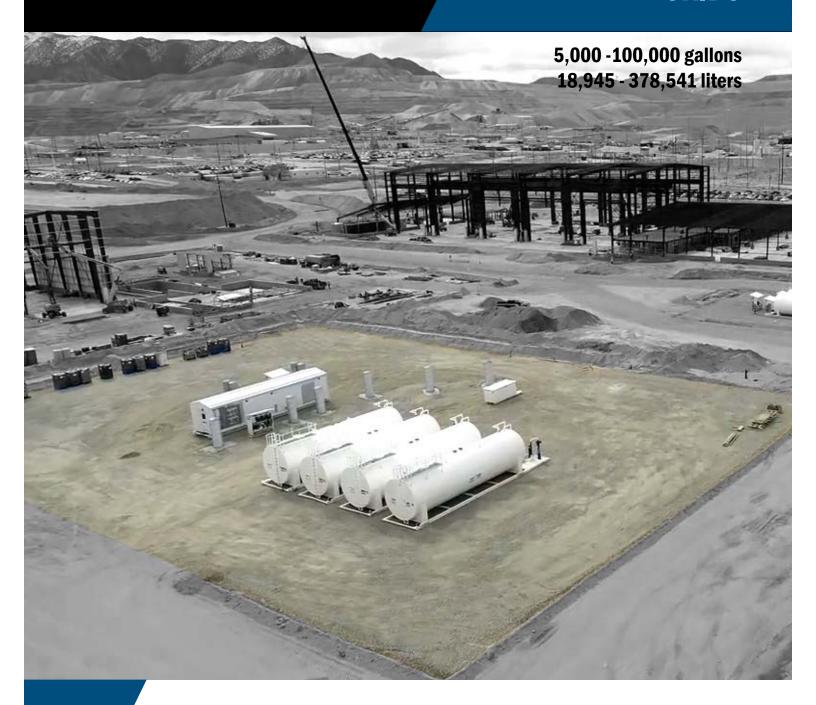

BEST RETURN ON INVESTMENT IN A FUEL & LUBE ASSET

GROUND FORCE WORLDWIDE

FUEL & LUBE SKIDS

DESIGNED FOR MAXIMUM CAPACITY & EFFICIENT DELIVERY


Ground Force Fuel & Lube Skids are engineered for performance and built to last. Our fuel and lube skids are custom designed to meet your product delivery requirements. Offering multiple configurations to include office spaces, work space and restrooms, Ground Force Worldwide Fuel and Lube Skids provide the BEST RETURN ON INVESTMENT IN A FUEL AND LUBE ASSET.







requirements.

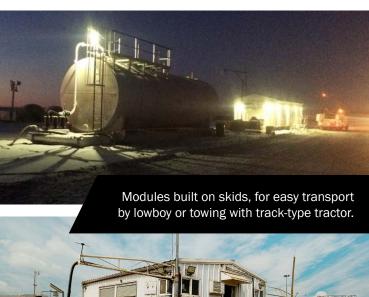

FUEL & LUBE SKIDS:

	TYPE	CAPACITY
	FUEL ONLY	Diesel: 5,000 - 100,000 gal. (18,927 - 378,541 L)
	LUBE ONLY	Lubricant: 11,400 – 40,000 gal. (43,153 - 151,416 L) Grease: 1,100 - 3,500 lb. (499 - 1,587 kg)
	FUEL & LUBE	Fuel: 10,000 - 100,000 gal. (37,854 - 378,541 L) Lubricant: 2,000 - 10,000 gal. (7,570 - 37,854 L) Grease: 1,100 - 3,500 lb. (499 - 1,587 kg)
	DIESEL EXHAUST FLUID (DEF)	Diesel Exhaust Fluid: 5,000 - 10,000 gal. (18,927 - 37,854 L)





SPECIAL FEATURES

- Fuel Delivery 120 -300 GPM (454 1,135 LPM)
- Full product filtration
- Fully-baffled product tanks
- Product metering systems
- Product tank level gauges
- Run by mine power or gen-set

LUBE/EQUIPMENT "DOG-HOUSE"

- Includes machinery and product tank enclosure
- · Mounted directly to heavy-duty skid frames
- · Single or multiple reel rack assembly
- · Built-in spill containment

FUEL TANK SYSTEMS

- · Double wall certified tanks
- Mounted directly to heavy-duty skid frames
- Vents on primary and secondary tanks
- Sight gauges
- Leak detection system
- · High-efficiency filtration system
- Top-of-tank catwalk assembly

OPERATOR EASE & SAFETY

- Built on skids for easy transport by lowboy or towing with track-type tractor
- Ground-level/remote-fill for all products
- New and used filter storage
- Enclosed ground level rear and/or side reel compartments
- Mine-site lighting packages
- Anti-Slip walkways and handrails

PRODUCT AVAILABILITY & OPTIONS

- Diesel fuel capacity from 5,000 100,000 gal. (18,927 378,541 L)
- New oil & coolant capacity from 2,000 10,000 gal. (7,570 37,854 L)
- Single or multiple grease bins 1,100 3,500 lb. (499 1,587 kg.)
- Configurations available to utilize customer oil, grease and DEF totes
- Heated product tanks available
- Insulated and heated, and/or AC configurations available
- Spring, Hydraulic, and Electric reel available
- Single or multiple reel rack assembly
- Transfer pumping system for loading product tanks
- · Used oil and coolant tanks
- Air compressor with reservoir tank
- Office Space, Workspace, Restrooms with HVAC
- · Optional high pressure wash system
- Kidney-loop filtration systems
- Roll-over protection system

OPTIONAL FLUID LEVEL MONITORING SYSTEM

- In-cab fluid level monitoring for all product tanks
- Digitally controlled monitor with backlit LCD for low-light operations
- Touch screen functionality and expandable system components available for alternate locations











THE GROUND FORCE DIFFERENCE

Innovative & Diverse Products
Loyalty & Devotion to our Customers
Global Service & Support



6001 E. Seltice Way
Post Falls, ID 83854 U.S.A.
+1.208.664.9291 | Fax 208.664.9475
solutions@gfworldwide.com
gfworldwide.com